

flow switch for liquid media with analog temperature output



flow-captor 422x.40M/.41M

The **flow-captor** type 412x.40/.41M is a compact, precise flow switch with analog display in a rugged stainless steel housing. They operate based on the calorimetric principle. The flow-captor allows to set an exact flow set-point and will display simultaneously the flow rate up to the lowest flow conditions.


- Precise switching flow monitor for water or oil based media **up to 100 bar**
- High accuracy also under low flow conditions
- Separate adjustment for „range“ and „set-point“
- Analog display of actual flow rate and display of adjusted set-point value
- Analog temperature output
- **ISO 9001:2015**



Technical Data		
Typ	4220.40M/.41M	4221.40M/.41M
Medium	water-based	oil-based
Sensor Data		
Measuring range	0 - 20 cm/s to 0 - 300 cm/s, cont. adjust ¹⁾	0 - 30 cm/s to 0 - 300 cm/s, cont. adjust ²⁾
Set-point range	ca. 15 % - 90 % of measuring range setting	
Medium temperature	-20 °C bis +80 °C	
Ambient temperature	-20 °C bis +70 °C	
Pressure	max. 100 bar (1000 Kpa)	
Response time	2 - 10 sec., according to range setting	2 -15 sec., according to range setting
Linearity deviation	< 5 % ¹⁾	< 5 % ²⁾
Repeatability	< 2 %	
Hysteresis	ca. 10 %	
Mechanical Data		
Protection class	IP 67	
Material housing	stainless steel WN 1.4305 / AISI 303 (M)	
Material of sensor probe	stainl. steel WN 1.4305 / AISI 303 alt. WN 1.4571 / AISI 313Ti (A), other materials on request	
Thread	G ½ " BSP, alt. ½ " 14 - NPT	
Electrical connection	2 m oilflex cable, 7 x 0,5 mm ²	
Electrical Data		
Operating voltage	18 - 30 VDC	
Switching current / Contact load	≤ 5 A, 120 VAC / ≤ 3A, 250 VAC / 5A, 150W at VDC	
Electrical output, flow	Relay with potential contact	
Initial operation	approx 10 sec. after connection of power	
Flow < set-point	.40	.41
- LED, green	off	off
- Output relay	activated	not activated
Temperature output	-10 °C to +80 °C $\hat{=}$ 4 - 20 mA	

¹⁾ data relate to water

²⁾ calibrated with insulation oil type "Shell Diala S4 ZX-1"

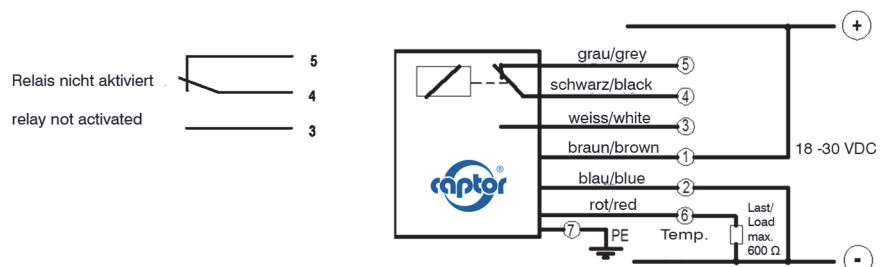

weber

Sensors GmbH Strohdeich 32
Sensors Ltd. 66 Eastbourne Road, Southport
Sensors LLC. 4462 Bretton Court, Building 1, Suite 7

DE-25377 Kollmar
Merseyside PR8 4DU, UK
Acworth, Georgia 30101, USA

Tel.: +49 (0)4128 - 591 · Fax: - 593

Tel.: +44 (1704) - 551684 · Fax: - 551297

Tel.: +1 (770) 592 - 6630 · Fax: - 592 6640

www.captor.de

info@captor.de

sales@captor.co.uk

sales@captor.com

Technical data subject to alteration! Rev. AJ 29.06.22