

flow switch for liquid media with analog temperature output



flow-captor 422x.8xM S141


The **flow-captor** 422x.80/.81M S141 is a family of compact, precise measurement flow switches with analog temperature output and analog display in a rugged stainless steel housing. They operate based on the calorimetric principle. The flow-captor allows to set an exact flow set-point and will measure simultaneously the flow rate up to the lowest flow conditions.

- Precise switching flow monitor for water or oil based solutions **up to 100 bar**
- High accuracy also under low flow conditions
- Seperate adjustment for „range“ and „set-point“
- Analog display of actual flow rate and display of adjusted set-point value
- LED display for output status
- **ISO 9001:2015**



Technical Data		
Type	4220.8xM S141	4221.8xM S141
Medium	water based solutions	oil based solutions
Sensor Data		
Measuring range	0-20 cm/s to 0-300 cm/s, cont. adjust ¹⁾	0-30 cm/s to 0-300 cm/s, cont. adjust ²⁾
Set-point range	approx. 15%-90 % of measuring range setting	
Medium temperature	-20°C to +80°C	
Ambient temperature	-20°C to +70°C	
Pressure	max. 100 bar	
Response time	2 s - 10 s, according to range setting	2 s - 15 s, according to range setting
Linearity deviation	< 5% ¹⁾	< 5% ²⁾
Repeatability	< 2%	
Hysteresis	approx. 10 %	
Mechanical Data		
Protection class	IP 67	
Housing	stainless steel WN1.4305 / AISI 303 (M)	
Sensor head	stainless steel WN1.4305 (AISI 303) alt. WN 1.4571 (AISI 313 Ti): A, other materials on request	
Thread	G 1/2" BSP, alt. 1/2" - 14 NPT	
Connection	7-pin Binder, (order cable 4926 separately)	
Electrical Data		
Operating voltage	90 - 125 VAC	
Switching current / Contact load	≤ 5 A (125 VAC), max. 5A 150W at VDC	
Electrical output, flow	relay with potentialfree single pole double throw contact	
Initial operation	approx. 10 s after connection of power	
Flow < set-point	.80	.81
- LED, green	off	off
- Output relay	activated	not activated
Temperature output	-10°C bis +80°C $\hat{=}$ 4 - 20 mA	

¹⁾ data relate to water ²⁾ calibrated with insulation oil type "Shell Diala"

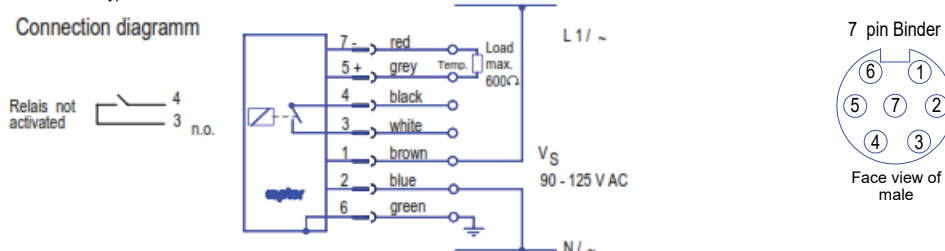

weber

Sensors GmbH Strohdreich 32
Sensors Ltd. 66 Eastbourne Road, Southport
Sensors LLC. 4462 Bretton Court, Building 1, Suite 7

DE-25377 Kollmar, Germany Tel.: +49 (0)4128 - 591 · Fax: - 593
Merseyside PR8 4DU, UK Tel.: +44 (1704) - 551684 · Fax: - 551297
Acworth, Georgia 30101, USA Tel.: +1 (770) 592 - 6630 · Fax: - 592 6640

www.captor.de
info@captor.de
sales@captor.co.uk
sales@captor.com